

# FAR EAST

威遠企業 KITCHEN SOLUTIONS

October 2011



User guide (NG)

簡潔 **Compact** wok cooker



Installation instructions and user guide

# FAR EAST KITCHEN SOLUTIONS

## COMPACT COOKING RANGE (N.G.)

### GENERAL

The Far East Kitchen Solutions 'Compact' cooking range will be supplied for use with natural gas. The correct type of gas to be used with the range will always be shown on the data plate. If a range is required to be used with a gas other than the one for which it was originally supplied the Far East Kitchen Solutions must be contacted to supply the correct parts, and procedure instructions necessary for the conversion.

The Compact Cooker can be supplied in several different configurations, all featuring a single central burner ring. Some variants may have a door fitted to the front, a swing spout water tap mounted to the top and/or a connection to mains drainage.

Except for certain controls and burner manifolds etc, the Far East Kitchen Solutions Cooker is constructed from high quality stainless steel.

These instructions cover the natural gas version of the following models:

**D1**

**NO CONVERSION SHOULD BE PERFORMED ON SITE**

**SAFETY NOTES**

The installation of this equipment must be carried out by a competent person (e.g. Gas Safe Registered) and must comply with the Gas Safety Regulations, Local Authority Regulations, Fire Precautions Act and the recommendations contained in the British Codes of Practice.

- To maintain stability and satisfactory combustion it should be used with woks and stock pots between 12" (300mm) and 16" (400mm) in diameter.
- It is important not to disturb the air combustion admission nor the combustion products evacuation of this appliance.
- It is the kitchen supervisor's responsibility to warn users of this appliance to wear suitable protective clothing.
- During normal operation, parts of the equipment will become hot. The user must take suitable precautions to prevent accidental burns.
- In the event of a fault, the equipment must be turned off at both the gas control valve and the main isolation valve and a competent person informed.
- Lighted burners should never be left unattended, or without having a pan placed over them.
- There must be water on the cook top when any burners are lit.
- For pans over 14" diameter, a special stockpot stand is available as an optional extra.
- It is important, in the interest of safety and good performance, to ensure that the appliance is regularly maintained and serviced. This can be performed by Far East Kitchen Solutions. Our engineers can inspect and service appliances, rectifying faults and replacing parts as necessary to keep the appliance in good working order.

**WARNING!**

- This appliance has been built for Natural Gas.
- This appliance must be installed in an area which has sufficient ventilation to remove any escaped gases, for example when igniting pilots.
- Ensure an adequate supply of fresh air is provided in the kitchen area.
- Never supply a cooker with a gas other than indicated on the data plate.

## DIAGRAM: PROTOTYPICAL D1, UK &amp; IRELAND


- All measurements in millimetres unless otherwise stated
- **Diagram not to scale**

**D1**

45 kg (typical, dry)

5 L water capacity (approx)

up to 38.3 kW heat input (NG)

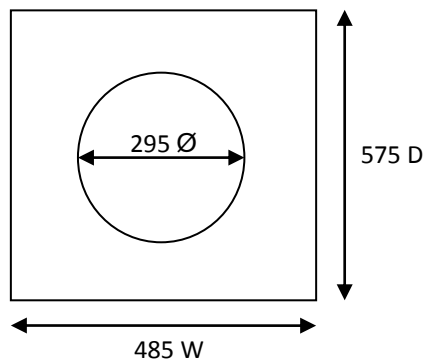**Plan view**

## BURNERS FITTED

3 Bar Burner	Full Rate	15.55 kW
Flamaire V6 Burner	Full Rate	15.60 kW
JP1 Burner	Full Rate	16.51 kW

## INSTALLATION

## TECHNICAL DATA

## Heat Inputs and Jet Sizes

All values are given using the net Calorific Value.

## NATURAL GAS G20 GOVERNED APPLIANCE

	<b>Heat Inputs</b>		<b>Injector</b>	
	<i>kW</i>	<i>BTU/hr</i>	<i>Size (mm)</i>	<i>Marking</i>
Flamaire V6 Burner @ Full Rate	15.60	53,250	1.32	54
3 Bar Burner @ Full Rate	15.55	53,000	1.80	180
2 Bar Burner @ Full Rate	10.30	35,100	1.80	180
JP1 Burner @ Full Rate	16.51	56,330	1.613	54

## NATURAL GAS G25 GOVERNED APPLIANCE


	<b>Heat Inputs</b>		<b>Injector</b>	
	<i>kW</i>	<i>BTU/hr</i>	<i>Size (mm)</i>	<i>Marking</i>
Flamaire V6 Burner @ Full Rate	15.60	53,250	1.57	52
3 Bar Burner @ Full Rate	15.55	53,000	1.98	200
2 Bar Burner @ Full Rate	10.40	35,500	1.98	200

## SET UP PROCEDURE

The Appliance must be set up using the following procedure:

- Connect ½" industrial catering flex (not supplied)
- Check inlet pressure at its nominal according to gas being used
- Light the burner and operate full rate.
- Adjust the ½" governor so that the burner pressure is reading **15.0 mbar** (not supplied). After setting the governor, it must be sealed immediately.

COOKER DIMENSIONS

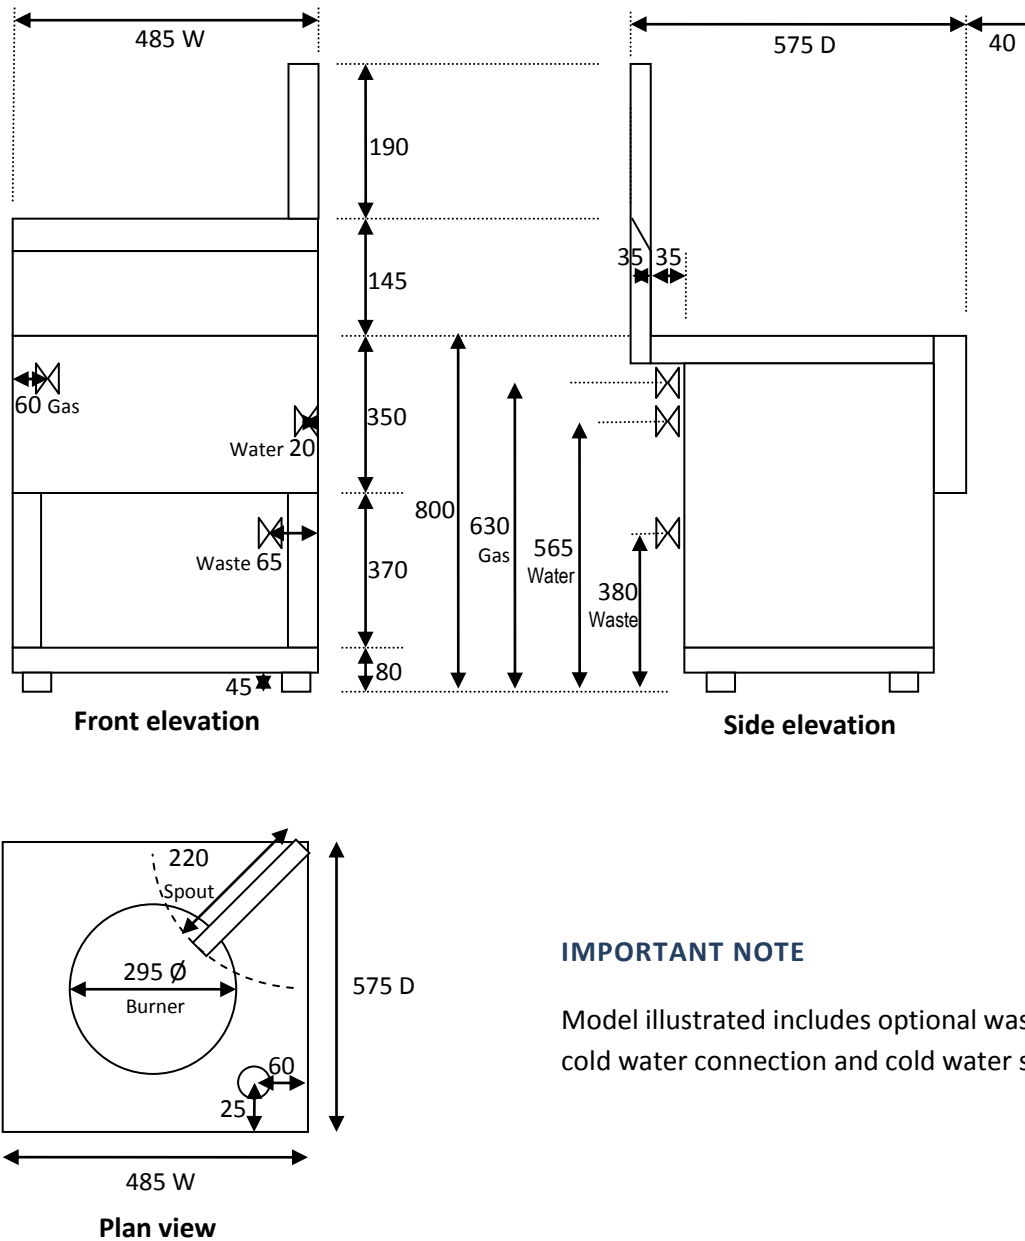

IMPORTANT NOTE

Model illustrated includes optional waste connection, cold water connection and cold water spout/tap

N.B.1 Therm = 100,000 BTU/hr = 100 ft<sup>3</sup>/hr  
 = 1,000 BTU/hr = 1 Cu ft

Incoming Main

Normal Meter Size

1.5"  
 2.0"  
 2.5"  
 3.0"

550 Cu.ft  
 880 Cu.ft  
 1412 Cu.ft  
 2296 Cu.ft

## PLUMBING INSTRUCTIONS

- Determine route of gas pipes to the appliances. Check for hot and cold water pipes to cookers and sinks. The room must also be well ventilated.
- Ensure proposed pipe work gives access for user to clean wall and floors regularly and does not obstruct doorways or walk ways.
- Clear away existing cooker and equipment. Clean wall and floor before placing new cooker in position.
- Position the cooker ensuring the top shelf is flush to the back wall.
- Level the cooker by adjusting the feet until all the water on the cooker top flows into the drain at the side. This can be determined by a spirit level or by filling up the top with water, remembering to close the waste outlet valve.
- Replace the removable burners and rings in accordance with the drawing.
- Connect the cold water supply to the tap (if fitted), waste pipe (if fitted); connect gas. Check for gas soundness and water leaks.
- Check gas pipe, including manifold, M.I. pipes and fittings, pilot lights and burners for any leaks. Ensure the burners are cross lighting and igniting correctly.
- Check the gas pressure in accordance with the data plate.
- No settings are to be altered once the cooker has left the factory.
- Show the user how to clean the burners, pilot lights, etc. A Far East Kitchen Solutions engineer or other similarly qualified person must do this.

## OPERATING INSTRUCTIONS

## WATER

- Ensure that there is water to the tap (if fitted). Check the drain valve is closed. Run cold water onto the cook top (if a tap is not fitted, use a jug or bucket). Continuously monitor the water level whilst any burners are lit and ensure the water depth is nominally 0.75 cm.

**WARNING!**

- This appliance is not fitted with an overflow pipe, be careful not to overfill the cook top.

## LIGHTING THE BURNERS

- Check that the gas supply is turned on at the isolating tap and at the main gas valve.
- Rotate the yellow gas valve on the cooker front clockwise until fully open.
- To light the burner, push in and turn the tap handle to the PILOT position. Keep it pushed in to allow gas to reach the pilot burner. Apply a lit taper to the pilot light; hold in for approximately 20 seconds then release. If the pilot flame does not remain alight, repeat the process.
- The burner should now light up automatically from the pilot when the control valve is turned to the ON position.
- All pilot lights must be lit at all times. The pilots should be lit even if the burner is not being used.

## TURNING OFF THE BURNERS FOR SHORT PERIOD WHILST COOKING

- Turn the tap handle clockwise to the PILOT position.
- To re-light burner, turn the handle anti-clockwise to the FULL position.

## TURNING OFF THE BURNERS AND PILOT LIGHT

- Turn tap handle clockwise to PILOT position.
- Push in and turn OFF position.
- Rotate the yellow gas valve on the cooker front anti-clockwise until fully closed.

**WARNING!**

- If for any reason, the pilot lights are extinguished then no attempt must be made to re-light the burners for at least 3 minutes.
- Do not operate the burner without water on the cook top. Failure to do so will cause the cook top to crack and leak, and also invalidate your warranty.

## CLEANING

For basic kitchen hygiene daily cleaning is advisable. This will also help to prolong the life of the range. During the cleaning process it is essential to avoid wiping the grease or waste particles into the pilot burners to avoid blockage. Care must also be taken to avoid moving the position of the thermocouple probe. This is a safety device and any adjustment in the position of the probe will result in the gas supply to that burner being halted.

## STAINLESS STEEL SURFACES

- All surfaces are easier to clean if the spillage is removed before it becomes “burnt in”
- These should be cleaned with hot water then dried and polished with a soft cloth. Cleaning agents containing bleach caustic chemicals or abrasive particles should not be used, as the stainless steel will become damaged.
- Burners and burner rings can be removed for cleaning and should be replaced in reverse order making sure that they are properly located after assembly.
- Removable parts can be soaked in hot water and approved detergents, which quickly soften most “burnt on” marks and stains.

## CLEANING THE BURNERS

- Burners must be cleaned regularly using a degreasing agent and hot water.
- Do not clean the pilot light or thermocouple

## FLOOR CLEANING

For cleaning purposes, access to the floor area under the cooker is from the front.

**MAINTENANCE INSTRUCTIONS**

Maintenance should only be carried out by a competent person (e.g. Gas Safe Registered) and all work should comply with the Gas Safety Regulations.

**ROUTINE MAINTENANCE**

Maintenance, depending on the amount of use should be performed on a regular basis to keep the equipment in good working order. The commissioning checklist contained in the installation section of this manual can be used as a guide to routine maintenance, in addition to the service checklist in the service logbook. This along with a thorough cleaning program should ensure optimum performance and trouble free operation.

**SERVICE CHECK**

We recommend that a Gas Safe registered engineer check the appliance at least every 12 months. There is a service logbook at the end of this booklet, which the engineer should complete.

**REPLACEMENT PARTS**

Should any replacement parts be needed, please contact Far East Kitchen Solutions Service and Parts hotline on 01246 25 11 77 or visiting our website [www.FEKitchenSolutions.com](http://www.FEKitchenSolutions.com).

Assistance will be given with regards to the description of the parts required, part number, current prices and details of installation or if an engineer is required.

Far East Kitchen Solutions recommends using parts and accessory products on this cooker that are specifically approved for this purpose by us. These parts and products have been functionally tested for safety and reliability by us.

# FAR EAST

---

威遠企業 KITCHEN SOLUTIONS

**Telephone** (Mon-Fri, 0900-1730)

Parts and service: 01246 251177

Sales and enquiries: 01246 251188

**Facsimile**

01246 251199

**Website**

[www.fekitchensolutions.com](http://www.fekitchensolutions.com)

**E-mail**

[info@fekitchensolutions.com](mailto:info@fekitchensolutions.com)

**Postal**

Far East Kitchen Solutions, Coney Green Farm, Lower Market Street Clay Cross, Derbyshire.  
S45 9NE

Far East Kitchen Solutions is a trading name of Far East Industries Limited,  
registered in the United Kingdom, company no. 01736291.

Head office: Far East Industries Ltd, Wingfield View, Coney Green, Clay Cross, Derbyshire. S45 9JW.

**© Far East Industries Ltd 2011**  
**All rights reserved**

This document is the property of Far East Industries Ltd.  
No use may be made of its contents other than that expressly authorised.

## SERVICE LOGBOOK

Your cooker should be serviced by a Gas Safe engineer certified to work on cooking ranges, **at least once every 12 months**. Failure to do so will have a serious impact on your cookers reliability and will invalidate your warranty or guarantee. You should ensure the engineer completes the service log overleaf as evidence of having the appropriate work performed.

Far East Kitchen Solutions recommends using parts and accessory products on this cooker that are specifically approved for this purpose by us. These parts and products have been functionally tested for safety and reliability by us. Original parts and accessories, and accompanying expert advice can be obtained by contacting our Service and Parts hotline on 01246 25 11 77 or visiting our website [www.FEKitchenSolutions.com](http://www.FEKitchenSolutions.com).

Your wok cooker is supplied with 1x custom-sized allen key for adjusting the valve handles.

## COOKER DATA

Model: \_\_\_\_\_ Serial No: \_\_\_\_\_ Gas: N.G. L.P.G

I hereby confirm that the appliance above has been installed to a satisfactory and legal standard

Date of installation: \_\_\_\_/\_\_\_\_/\_\_\_\_ Installer's signature : \_\_\_\_\_

Installer's name (print): \_\_\_\_\_ Gas Safe Badge No: \_\_\_\_\_

Business name (if applicable): \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

I hereby confirm I have taken delivery of my Far East Kitchen Solutions wok cooker

Owner's name (print): \_\_\_\_\_ Owner's signature : \_\_\_\_\_

## SERVICE CHECKLIST

- Gas safety check (pipes, valves, manifold inspection; pressure test; leak check)
- Inspect and grease all CE gas valves
- Clean burner and all jets
- Inspect water valves and pipework, repair/replace as required
- Inspect pilot lights, replace as required
- Inspect thermocouples, replace as required
- Visual check for corrosion and heat erosion of all metal parts, repair/replace as required

SERVICE ONE – TO BE COMPLETED WITHIN 12 MONTHS OF INSTALLATION

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE TWO – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE THREE – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE FOUR – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE FIVE – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE SIX – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE SEVEN – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE EIGHT – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE NINE – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE TEN – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE ELEVEN – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE TWELVE – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE THIRTEEN – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE FOURTEEN – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

SERVICE FIFTEEN – TO BE COMPLETED WITHIN 12 MONTHS OF PREVIOUS SERVICE

I hereby confirm that the appliance has been serviced in accordance with the service checklist

Date of service: \_\_\_\_/\_\_\_\_/\_\_\_\_ Engineer's signature : \_\_\_\_\_

Business name: \_\_\_\_\_ Gas Safe Cert No: \_\_\_\_\_

You have filled this service logbook. Please contact Far East Kitchen Solutions to obtain a new logbook.